




CTV30-48-110 MODEL SERIES




0-200 AMPERES 0-240 VOLTS

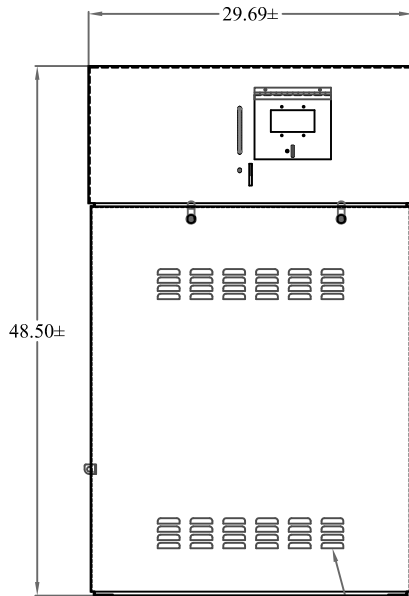


FRONT VIEW

LOUVERED DOOR with CAM LOCKS (STANDARD)

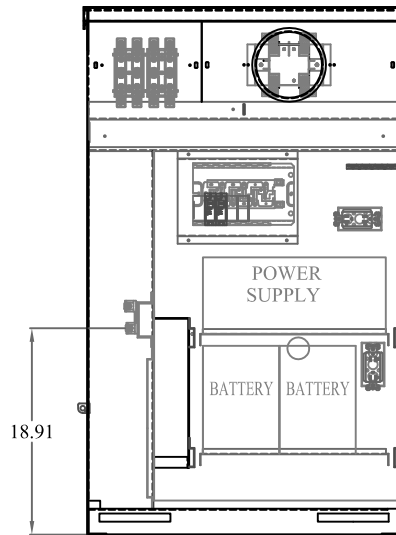

**FRONT VIEW
SHOWN LESS CUSTOMER DOOR**

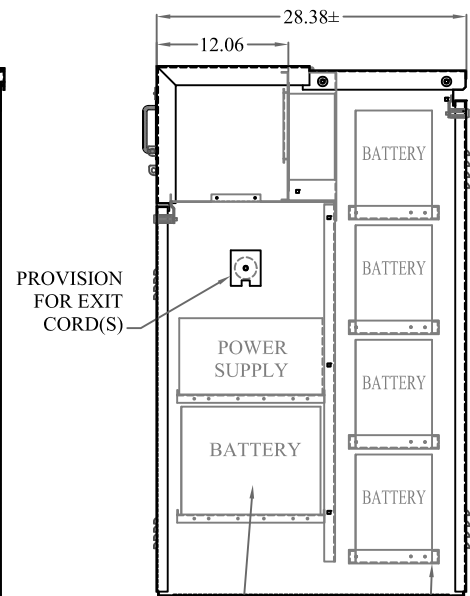


PROVISION FOR EXIT CORD(S)

1-POWER SUPPLY
10-BATTERIES (MAX)

SIDE VIEW

ALL TRAYS ARE EQUIPPED WITH DRAWER GUIDES (DYNAMIC LOAD RATED AT 100 lbs.)

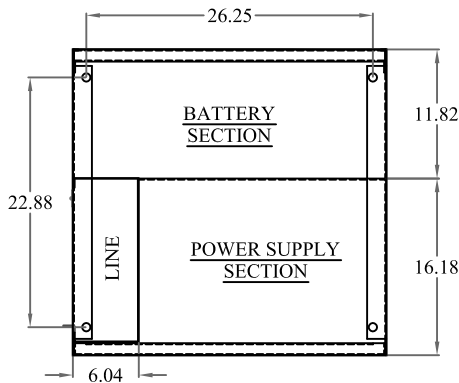

PLAN VIEW

SINGLE METER STAND-BY POWER SUPPLY PEDESTAL

STANDARD FEATURES:

- METER SOCKET WITH TEST BLOCKS 4-JAW
- UTILITY LANDING LUGS 250kCMIL
- CIRCUIT BREAKER INTERIOR COPPER BUS
- ACCOMODATES 6-CIRCUIT INTERIOR MAXIMUM
- DUPLEX RECEPTACLE FOR POWER SUPPLY
- MAXIMUM OF TEN (10) BATTERIES

SPECIFICATIONS

- * NEMA 3R CONSTRUCTION
- * POLYESTER POWDER-COATED FINISH EXCEEDS ASTM B-117 SPECIFICATIONS
- * FABRICATED FROM CORROSION-RESISTANT ZINC COATED STEEL
- * ASA 61 GRAY OR OTHERWISE SPECIFIED

- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL COMPONENTS UL LISTED
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE
- * UTILITY COVERS SEALABLE