



# USPDUD MODEL SERIES



0 - 200 AMPERES 0 - 600 VOLTS

## INDUSTRIAL CONTROL- SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT

CAT.NO. USPDUD-M200-318/24 480VAC 3PH 3WIRE 200AMPS

\*SHORT CIRCUIT RATING: 14,000 RMS SYMMETRICAL AMPS @ 480VAC MAXIMUM.

\*CIRCUIT BREAKERS 150-200 AMPS : WESTINGHOUSE TYPE ED.

\*CIRCUIT BREAKERS: 125-100 AMPS OR LESS @ 480V : WESTINGHOUSE TYPE GHB.


\*CIRCUIT BREAKERS 125 AMPS OR LESS @ 120/240V : WESTINGHOUSE TYPE BR, BD, BQ, GFCB, GENERAL SWITCH TYPE GAB, OR THOMAS & BETTS TYPE TB.

REPLACEMENT BREAKERS MUST BE SAME TYPE AND RATING.

\*AUTOMATIC TRIP IS INDICATED BY HANDLE POSITION MIDWAY BETWEEN (ON) AND (OFF). TO RESTORE POWER MOVE HANDLE TO (OFF), THEN (ON).

\*PANELBOARD IS SUITABLE FOR USE WITH 60/75 DEGREE C COPPER OR ALUMINUM WIRE.

\*SHIPPING TENDS TO LOOSEN ELECTRICAL CONNECTIONS - TIGHTEN ALL CONNECTIONS BEFORE ENERGIZING UNIT.

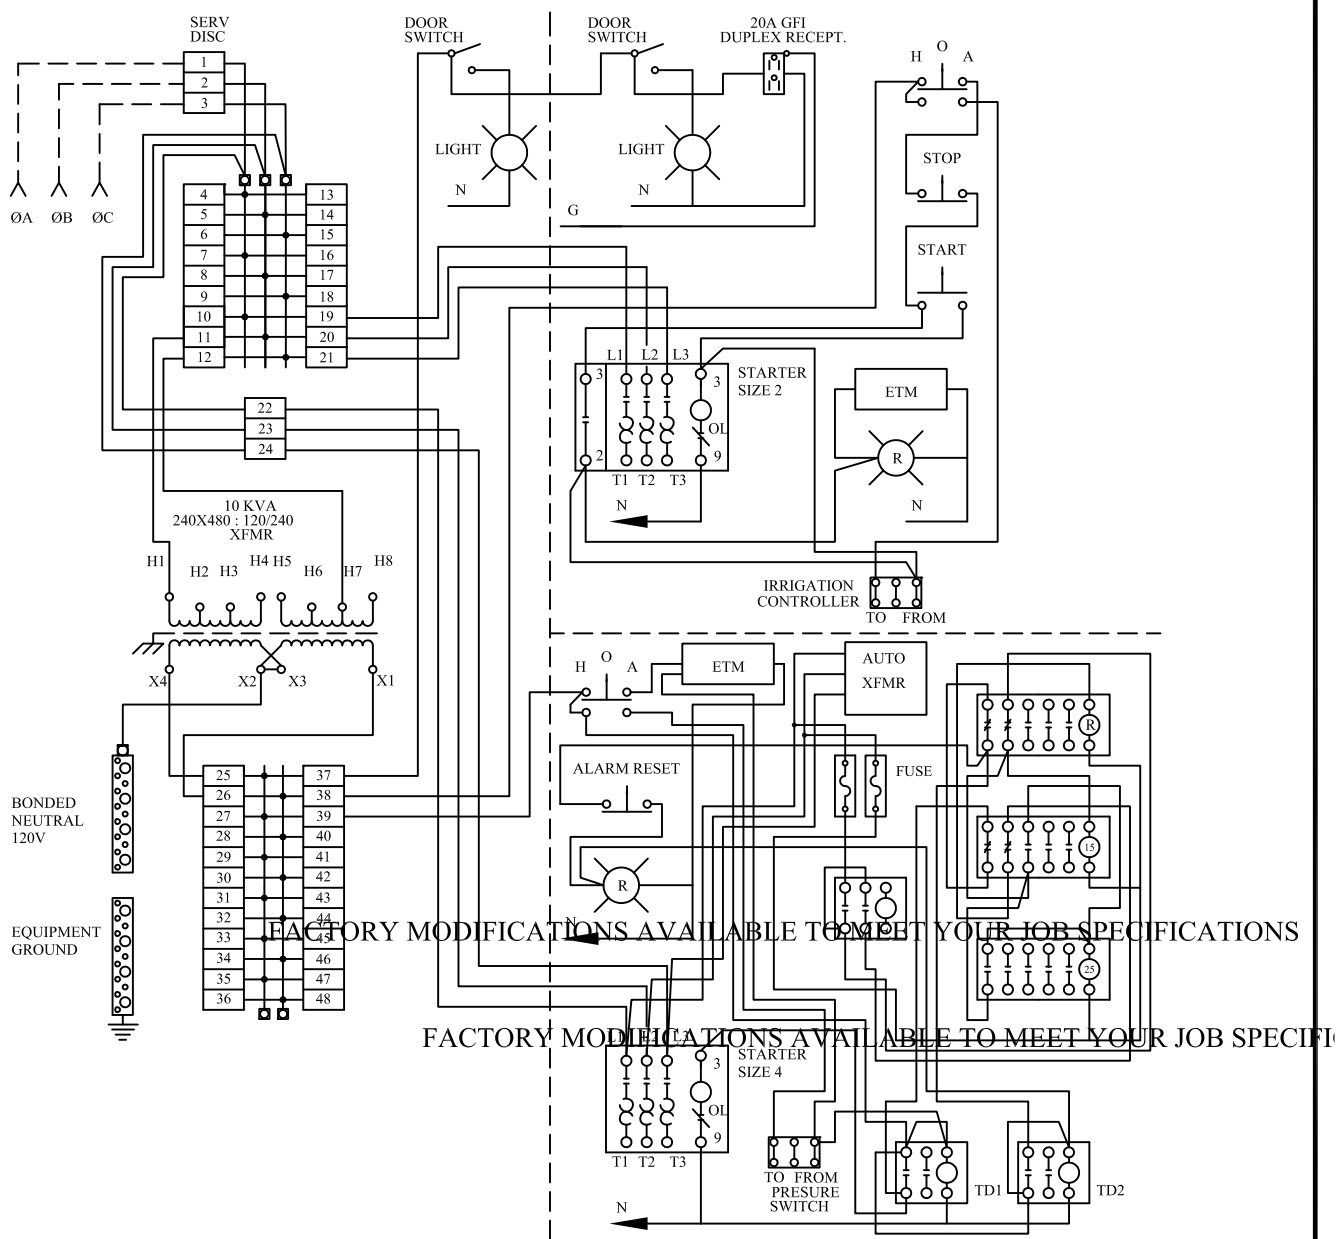

FACTORY MODIFICATIONS AVAILABLE TO MEET YOUR JOB SPECIFICATIONS  
CONTACT FACTORY REPRESENTATIVE FOR DETAILS